


### PRODUCT FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

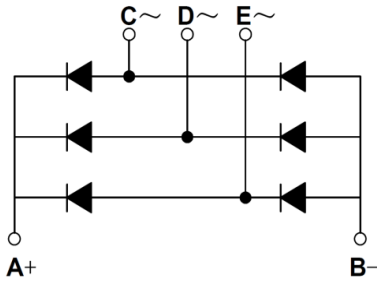

### APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter



### Module Type

Module Type	$V_{RRM}$ (Repetitive Peak Reverse Voltage)	$V_{RSM}$ (Non-Repetitive Peak Reverse Voltage)	Unit
MMD150FB120X	1200	1300	V
MMD150FB140X	1400	1500	
MMD150FB160X	1600	1700	
MMD150FB180X	1800	1900	

### ABSOLUTE MAXIMUM RATINGS

$T_C = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
$I_D$	Output Current(D.C.)	Three phase, half wave, $T_c = 95^\circ\text{C}$	150	A
$I_{FSM}$	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value, $T_c = 45^\circ\text{C}$	1500	
		1/2 cycle, 60HZ, peak value, $T_c = 45^\circ\text{C}$	1600	
$I^2t$	For Fusing	1/2 cycle, 50HZ, peak value, $T_c = 45^\circ\text{C}$	11.2	KA <sup>2</sup> S
		1/2 cycle, 60HZ, peak value, $T_c = 45^\circ\text{C}$	10.6	
$P_D$	Power Dissipation		1136	W
$T_J$	Junction Temperature		-40 to +150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-40 to +125	$^\circ\text{C}$
$V_{ISO}$	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), $t=1$ minute	3000	V
<b>Torque</b>	Module to Sink	Recommended (M6)	3~5	Nm
<b>Torque</b>	Module Electrodes	Recommended (M6)	3~5	Nm
$R_{thJC}$	Junction to Case Thermal Resistance	per diode	0.63	K/W
		per module	0.11	
<b>Weight</b>			210	g

**ELECTRICAL CHARACTERISTICS**

*T<sub>C</sub> = 25°C unless otherwise specified*

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit	
<b>I<sub>RM</sub></b>	Maximum Reverse Leakage Current	$V_R = V_{RRM}$		0.5	mA	
		$V_R = V_{RRM}, T_J = 125^\circ\text{C}$		10		
<b>V<sub>F</sub></b>	Forward Voltage Drop	$I_F = 150\text{A}$		1.45	V	
<b>V<sub>TO</sub></b>	For power loss calculations only , $T_J = 125^\circ\text{C}$				0.9	V
<b>r<sub>T</sub></b>					3.5	mΩ

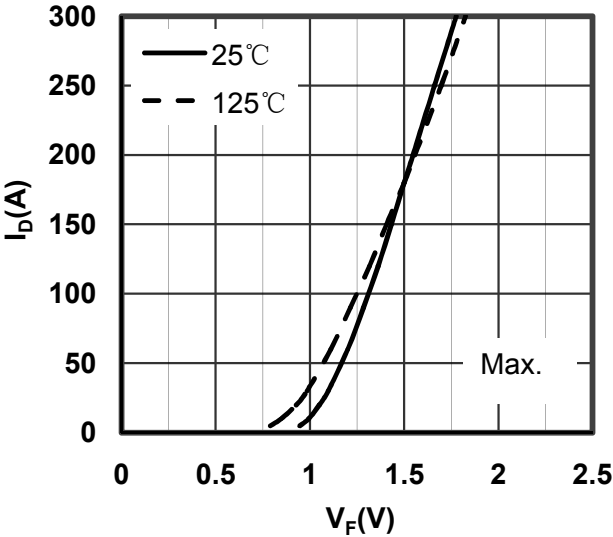


Figure 1. Forward Voltage Drop vs Output Current

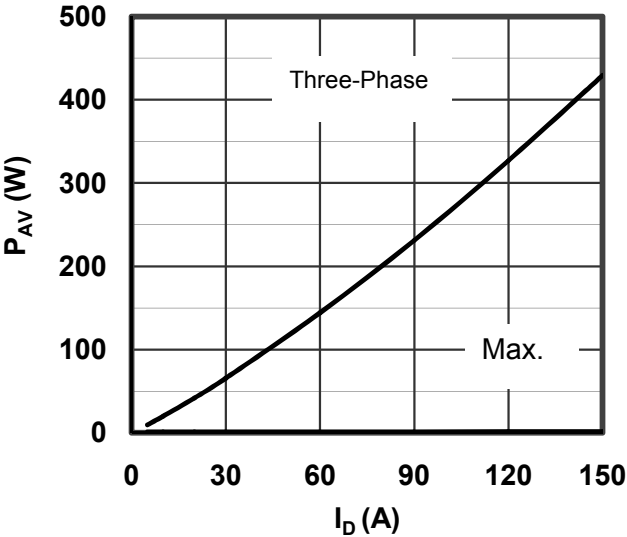


Figure 2. Power dissipation vs Output Current

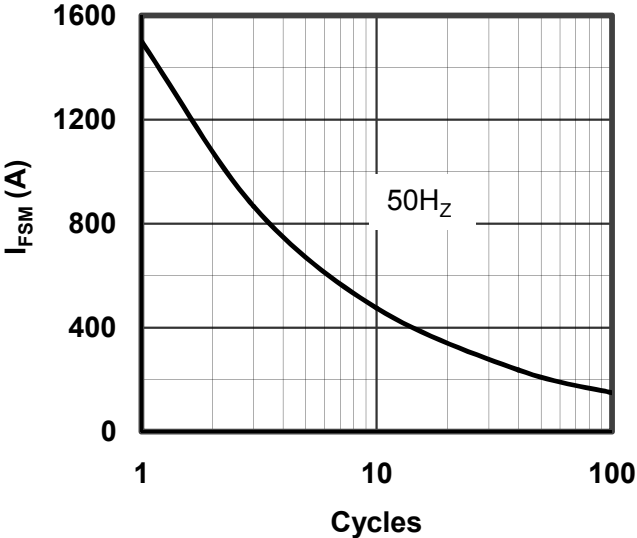


Figure 3. Max Non-Repetitive Forward Surge Current

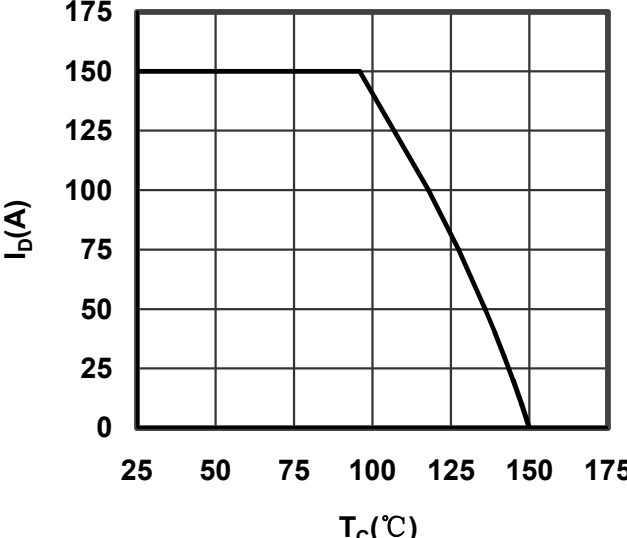


Figure 4. Output current vs Case temperature


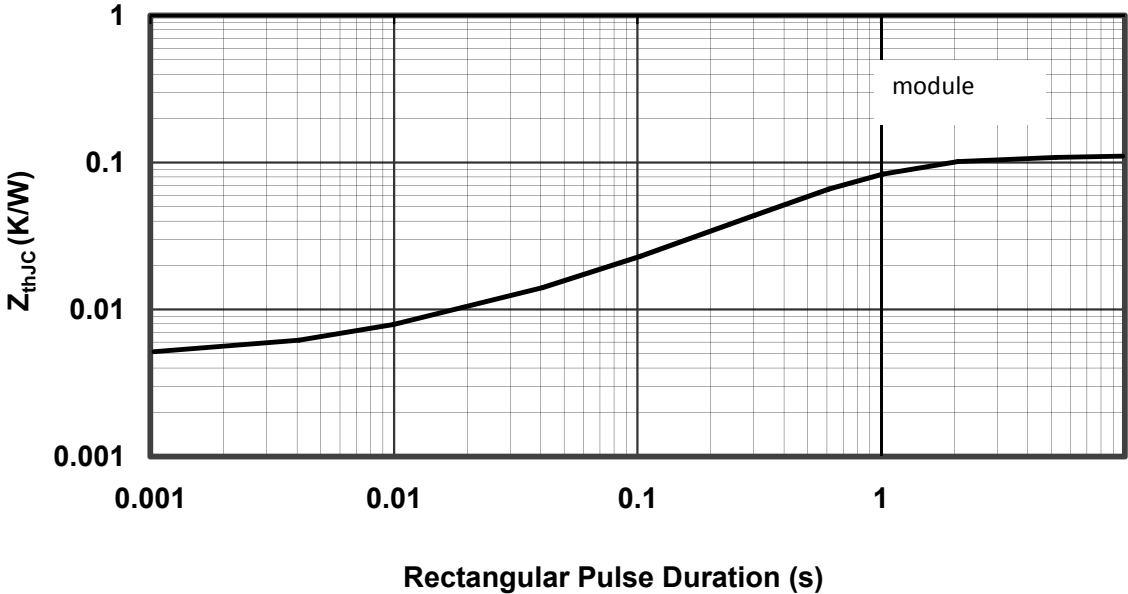


Figure 5. Transient Thermal Impedance

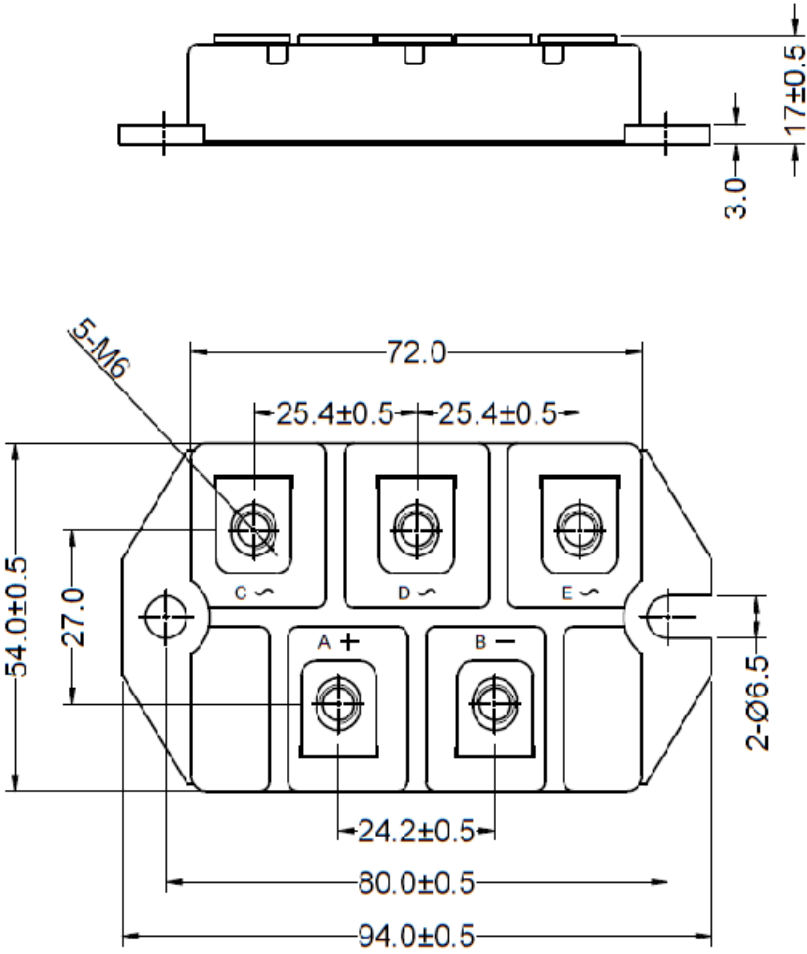

Dimensions in (mm)  
Figure 6. Package Outline