PRODUCT FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter

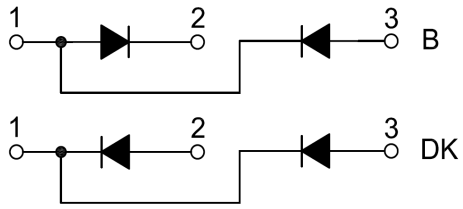

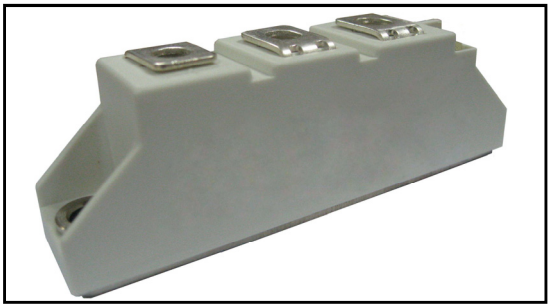

Module Type

Module Type	Circuit Diagram		V_{RRM} (Repetitive Peak Reverse Voltage)	V_{RSM} (Non-Repetitive Peak Reverse Voltage)	Unit
	B	DK			
	MMD130A120B	MMD130A120DK	1200	1300	V
	MMD130A140B	MMD130A140DK	1400	1500	
	MMD130A160B	MMD130A160DK	1600	1700	
	MMD130A180B	MMD130A180DK	1800	1900	

ABSOLUTE MAXIMUM RATINGS

T_C=25°C unless otherwise specified

Symbol	Parameter/Test Conditions		Values	Unit
$I_{F(AV)}$	Average Forward Current	Single phase, half wave, 180°conduction, Tc= 95°C	130	A
$I_{F(RMS)}$	R.M.S. Forward Current	Single phase, half wave, 180°conduction, Tc =95°C	204	
I_{FSM}	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value Tc =45°C	3450	
		1/2 cycle, 60HZ, peak value, Tc =45°C	3750	
I^2t	For Fusing	1/2 cycle, 50HZ, peak value Tc =45°C	59.5	KA^2S
		1/2 cycle, 60HZ, peak value, Tc =45°C	58.3	
P_D	Power Dissipation		500	W
T_J	Junction Temperature		-40 to +150	°C
T_{STG}	Storage Temperature Range		-40 to +125	°C
V_{ISO}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module-to-Sink	Recommended（M6）	3～5	N.m
Torque	Module Electrodes	Recommended（M5）	2.5～5	N.m
$R_{th(J-C)}$	Junction-to-Case Thermal Resistance		0.25	K /W
Weight			110	g

Add：#18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China
Tel.：+86-519-85163708 Fax：+86-519-85162291 Post Code：213022 Website：www.macmicst.com

ELECTRICAL CHARACTERISTICS

T_C =25°C unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = V_{RRM}$			0.5	mA
		$V_R = V_{RRM}$, T_J = 125°C			10	
V_F	Forward Voltage Drop	I_F=400A			1.5	V
V_{TO}	For power-loss calculations only , T_J = 125°C				0.85	V
r_T					1.6	mΩ

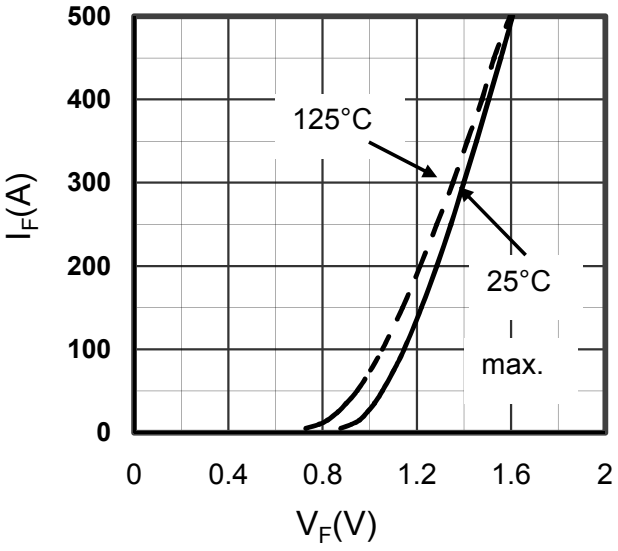

Figure1. Forward Voltage Drop vs Forward Current

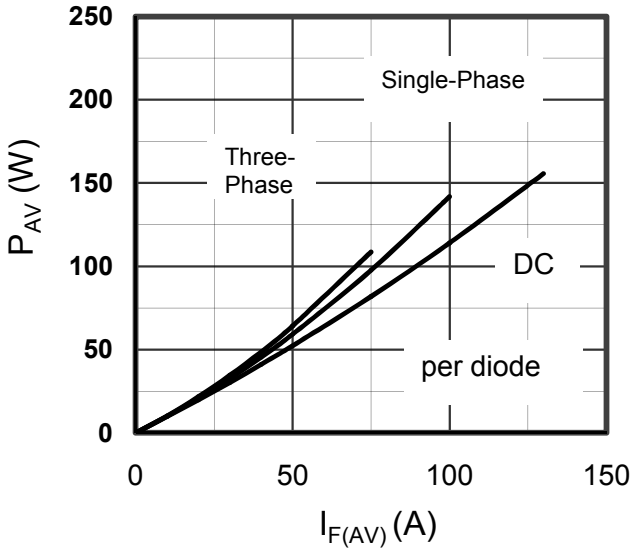

Figure2. Power dissipation vs. $I_{F(AV)}$

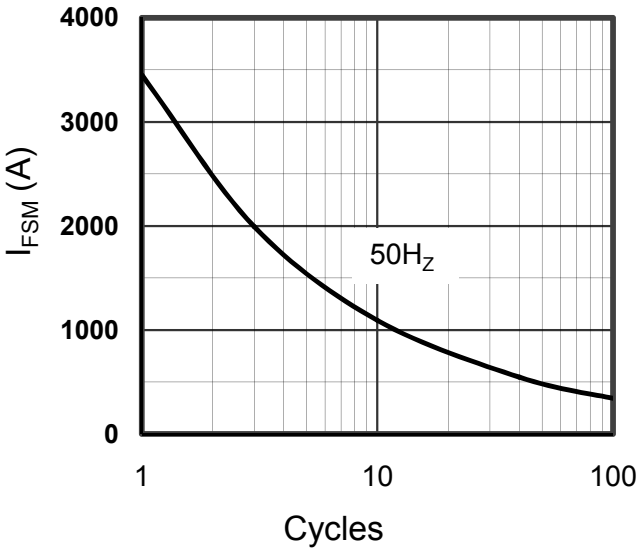

Figure3. Max Non-Repetitive Forward Surge Current

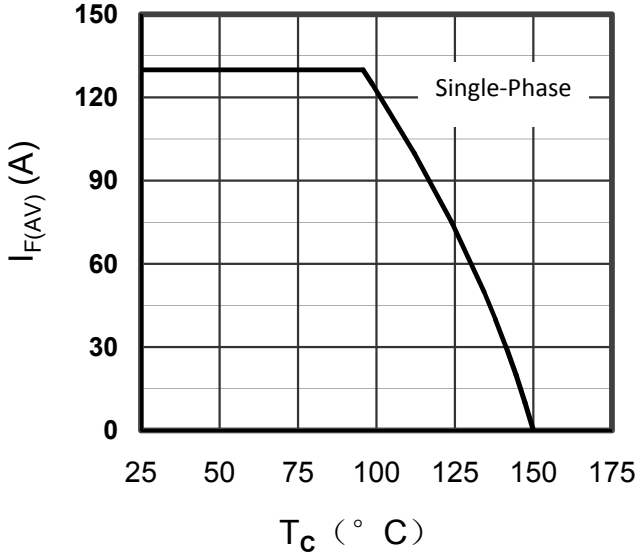

Figure4. Forward current vs.Case temperature

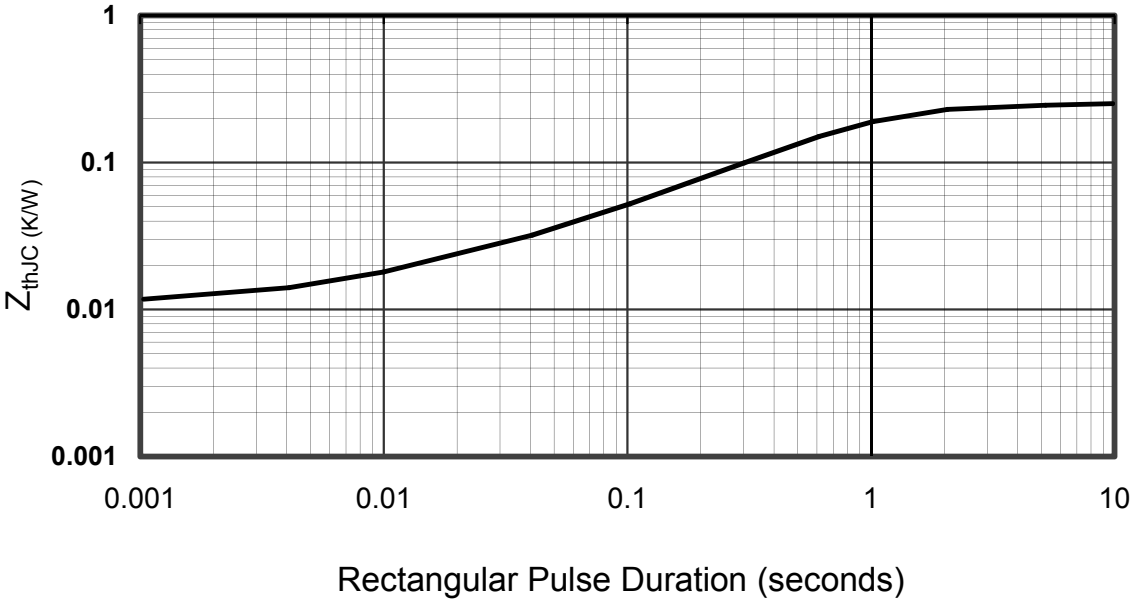

Figure5. Transient Thermal Impedance

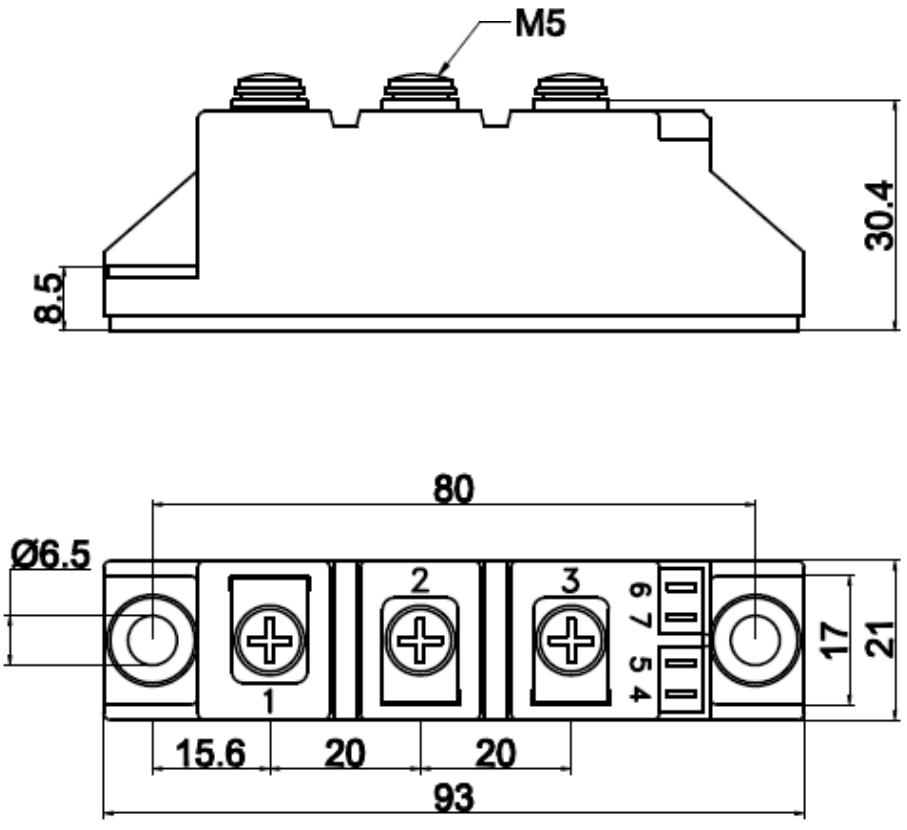

Dimensions in Millimeters and (Inchs)
Figure6. Package Outline