

PRODUCT FEATURES

- High Short Circuit Capability
- Free wheeling diodes with fast and soft reverse recovery
- $V_{CE(sat)}$ with positive temperature coefficient
- Ultra Low Loss, High Ruggedness
- UL recognized, file no. E332185



APPLICATIONS

- Inverter Convertor
- Welder SMPS and UPS
- Induction Heating

IGBT-inverter

ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Values | Unit |
|-----------|-----------------------------------|--------------------------|----------|------|
| V_{CES} | Collector Emitter Voltage | $T_J=25^{\circ}\text{C}$ | 1200 | V |
| V_{GES} | Gate Emitter Voltage | | ± 20 | |
| I_C | DC Collector Current | $T_C=25^{\circ}\text{C}$ | 105 | A |
| | | $T_C=80^{\circ}\text{C}$ | 75 | |
| I_{CM} | Repetitive Peak Collector Current | $t_p=1\text{ms}$ | 150 | |
| P_{tot} | Power Dissipation Per IGBT | | 630 | W |

Diode-inverter

ABSOLUTE MAXIMUM RATINGS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Values | Unit |
|-------------|---------------------------------|---|--------|----------------------|
| V_{RRM} | Repetitive Reverse Voltage | $T_J=25^{\circ}\text{C}$ | 1200 | V |
| $I_{F(AV)}$ | Average Forward Current | $T_C=25^{\circ}\text{C}$ | 75 | A |
| I_{FRM} | Repetitive Peak Forward Current | $t_p=1\text{ms}$ | 150 | |
| i^2t | | $T_J=125^{\circ}\text{C}, t=10\text{ms}, V_R=0\text{V}$ | 880 | A^2S |

IGBT-inverter
ELECTRICAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Min. | Typ. | Max. | Unit | |
|---------------|---|---|---------------------------|------|------|---------------|----|
| $V_{GE(th)}$ | Gate Emitter Threshold Voltage | $V_{CE}=V_{GE}, I_C=3\text{mA}$ | 5.0 | 6.2 | 7.0 | V | |
| $V_{CE(sat)}$ | Collector Emitter Saturation Voltage | $I_C=75\text{A}, V_{GE}=15\text{V}, T_J=25^{\circ}\text{C}$ | | 1.8 | 2.4 | | |
| | | $I_C=75\text{A}, V_{GE}=15\text{V}, T_J=125^{\circ}\text{C}$ | | 2.0 | | | |
| I_{CES} | Collector Leakage Current | $V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=25^{\circ}\text{C}$ | | | 1 | mA | |
| | | $V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=125^{\circ}\text{C}$ | | | 10 | mA | |
| I_{GES} | Gate Leakage Current | $V_{CE}=0\text{V}, V_{GE}=\pm 15\text{V}, T_J=25^{\circ}\text{C}$ | -400 | | 400 | nA | |
| R_{gint} | Integrated Gate Resistor | | | 3 | | Ω | |
| Q_g | Gate Charge | $V_{CE}=600\text{V}, I_C=75\text{A}, V_{GE}=\pm 15\text{V}$ | | 0.75 | | μC | |
| C_{ies} | Input Capacitance | $V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$ | | 5.52 | | nF | |
| C_{res} | Reverse Transfer Capacitance | | | | 260 | | pF |
| $t_{d(on)}$ | Turn on Delay Time | $V_{CC}=600\text{V}, I_C=75\text{A}$ $R_G=10\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load | $T_J=25^{\circ}\text{C}$ | | 100 | | ns |
| | | | $T_J=125^{\circ}\text{C}$ | | 110 | | ns |
| t_r | Rise Time | | $T_J=25^{\circ}\text{C}$ | | 60 | | ns |
| | | | $T_J=125^{\circ}\text{C}$ | | 60 | | ns |
| $t_{d(off)}$ | Turn off Delay Time | $V_{CC}=600\text{V}, I_C=75\text{A}$ $R_G=10\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load | $T_J=25^{\circ}\text{C}$ | | 410 | | ns |
| | | | $T_J=125^{\circ}\text{C}$ | | 450 | | ns |
| t_f | Fall Time | | $T_J=25^{\circ}\text{C}$ | | 60 | | ns |
| | | | $T_J=125^{\circ}\text{C}$ | | 75 | | ns |
| E_{on} | Turn on Energy | $V_{CC}=600\text{V}, I_C=75\text{A}$ $R_G=10\Omega,$ $V_{GE}=\pm 15\text{V},$ Inductive Load | $T_J=25^{\circ}\text{C}$ | | 5.5 | | mJ |
| | | | $T_J=125^{\circ}\text{C}$ | | 7 | | mJ |
| E_{off} | Turn off Energy | | $T_J=25^{\circ}\text{C}$ | | 4.8 | | mJ |
| | | | $T_J=125^{\circ}\text{C}$ | | 7.0 | | mJ |
| I_{sc} | Short Circuit Current | $tp_{sc}\leq 10\mu\text{s}, V_{GE}=15\text{V}$ $T_J=125^{\circ}\text{C}, V_{CC}=900\text{V}$ | | 420 | | A | |
| R_{thJC} | Junction to Case Thermal Resistance (Per IGBT) | | | | 0.2 | K/W | |

Diode-inverter
ELECTRICAL CHARACTERISTICS
 $T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Min. | Typ. | Max. | Unit |
|-------------|--|---|------|------|------|---------------|
| V_F | Forward Voltage | $I_F=75\text{A}, V_{GE}=0\text{V}, T_J=25^{\circ}\text{C}$ | | 2.05 | 2.5 | V |
| | | $I_F=75\text{A}, V_{GE}=0\text{V}, T_J=125^{\circ}\text{C}$ | | 2.00 | | |
| t_{rr} | Reverse Recovery Time | $I_F=75\text{A}, V_R=600\text{V}$ | | 125 | | ns |
| I_{RRM} | Max. Reverse Recovery Current | $di_F/dt=-1500\text{A}/\mu\text{s}$ | | 90 | | A |
| Q_{RR} | Reverse Recovery Charge | $T_J=125^{\circ}\text{C}$ | | 11 | | μC |
| E_{rec} | Reverse Recovery Energy | | | | 4.4 | |
| R_{thJCD} | Junction to Case Thermal Resistance (Per Diode) | | | | 0.5 | K/W |

MODULE CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Values | Unit |
|------------|-----------------------------|----------------------------|---------|------|
| T_{Jmax} | Max. Junction Temperature | | 150 | °C |
| T_{Jop} | Operating Temperature | | -40~125 | |
| T_{stg} | Storage Temperature | | -40~125 | |
| V_{isol} | Isolation Breakdown Voltage | AC, 50Hz(R.M.S), t=1minute | 3000 | V |
| CTI | Comparative Tracking Index | | > 200 | |
| Torque | to heatsink | Recommended (M6) | 3~5 | Nm |
| | to terminal | Recommended (M5) | 2.5~5 | Nm |
| Weight | | | 160 | g |

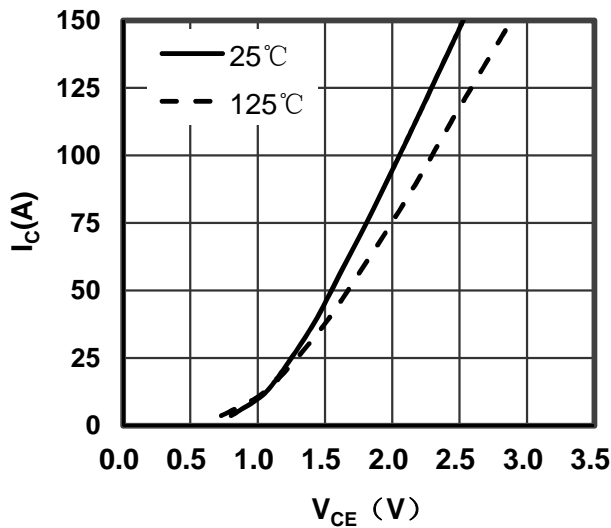


Figure 1. Typical Output Characteristics IGBT-inverter

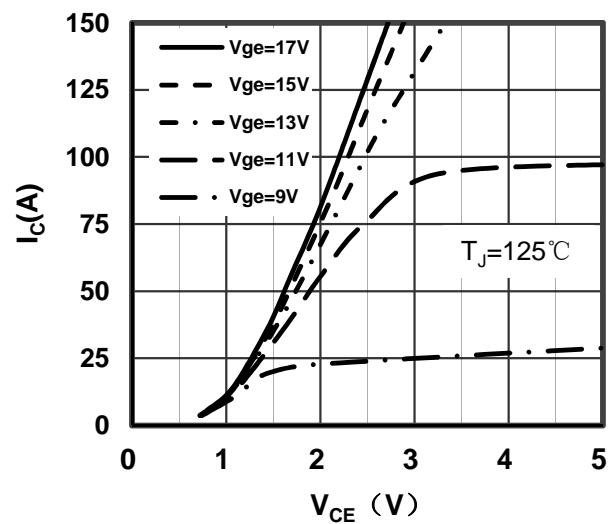


Figure 2. Typical Output Characteristics IGBT-inverter

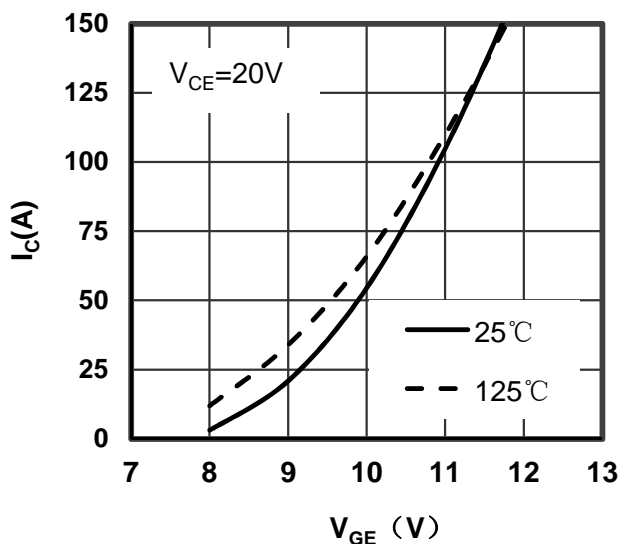


Figure 3. Typical Transfer characteristics IGBT-inverter

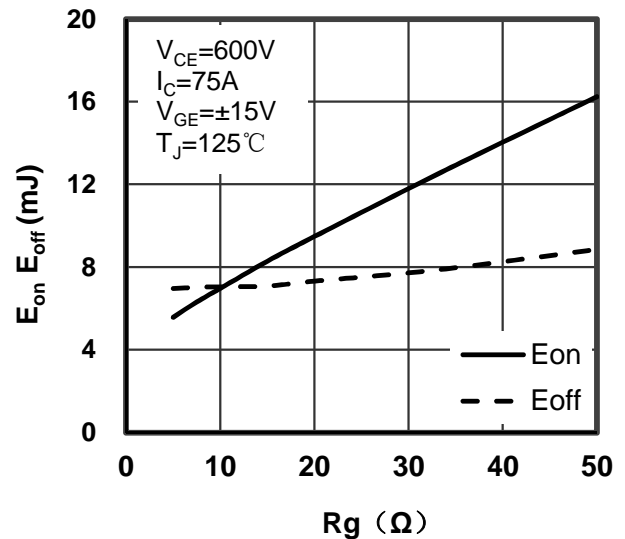


Figure 4. Switching Energy vs Gate Resistor IGBT-inverter

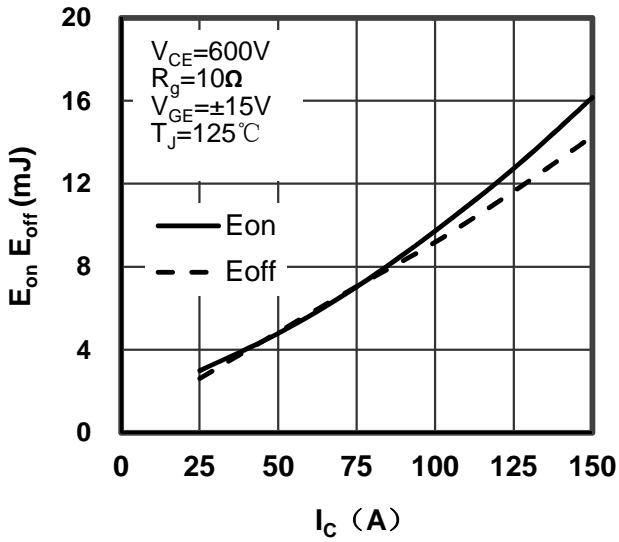


Figure 5. Switching Energy vs Collector Current IGBT-inverter

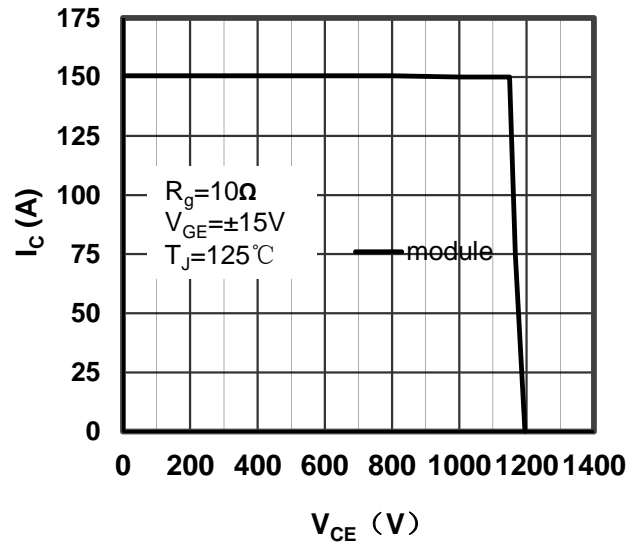


Figure 6. Reverse Biased Safe Operating Area IGBT-inverter

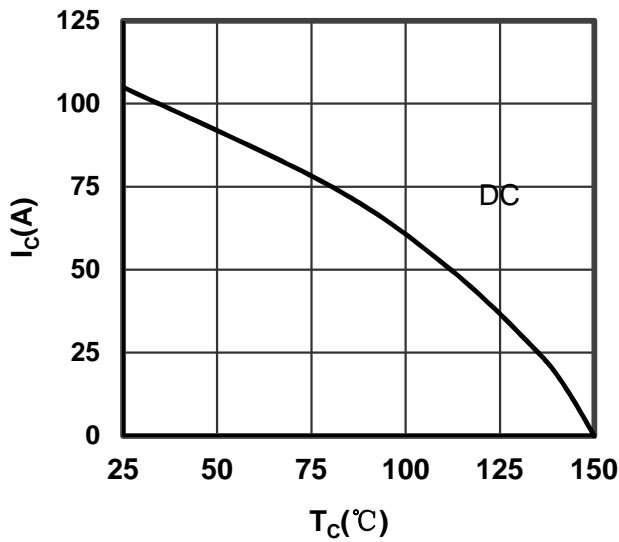


Figure 7. Collector Current vs Case temperature IGBT-inverter

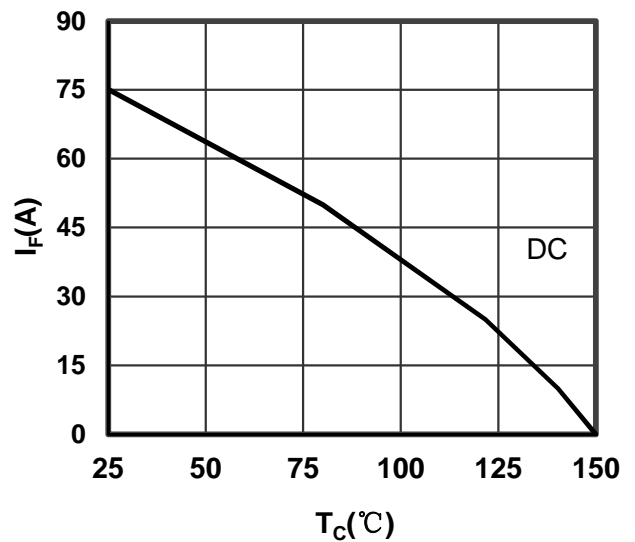


Figure 8. Forward current vs Case temperature Diode-inverter

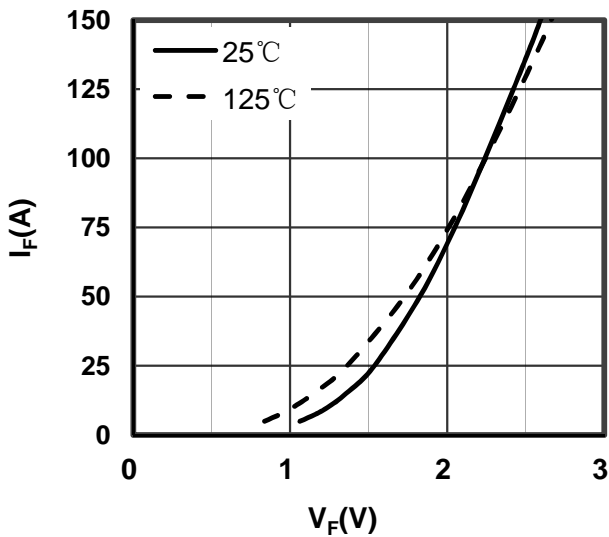


Figure 9. Diode Forward Characteristics Diode-inverter

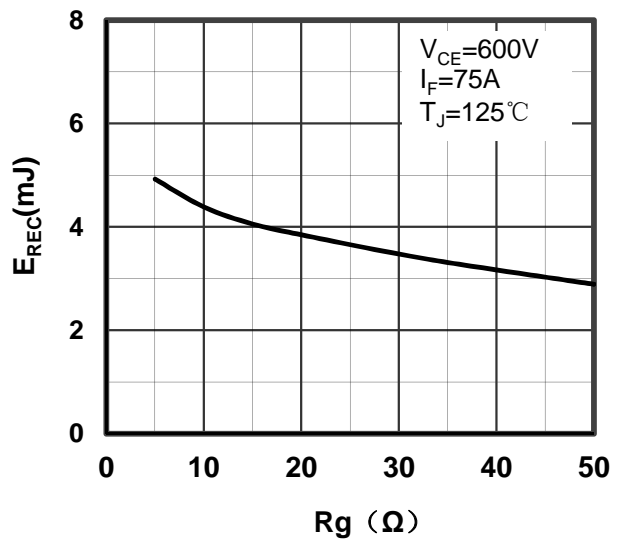


Figure 10. Switching Energy vs Gate Resistor Diode-inverter

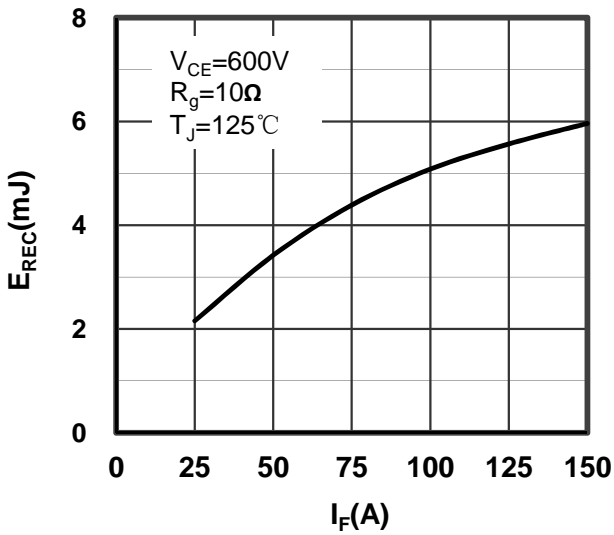


Figure 11. Switching Energy vs Forward Current Diode-inverter

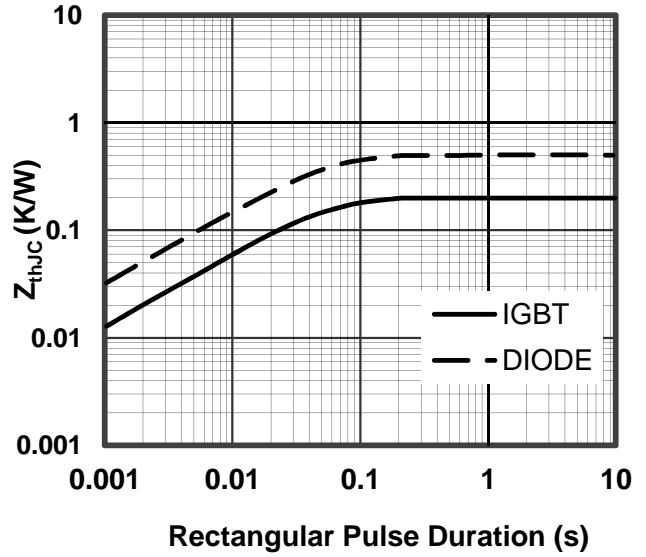


Figure 12. Transient Thermal Impedance of Diode and IGBT-inverter


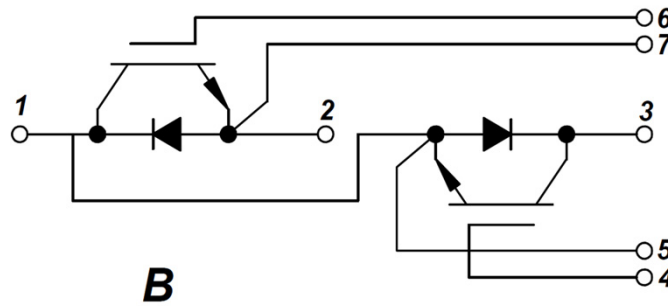


Figure 13. Circuit Diagram

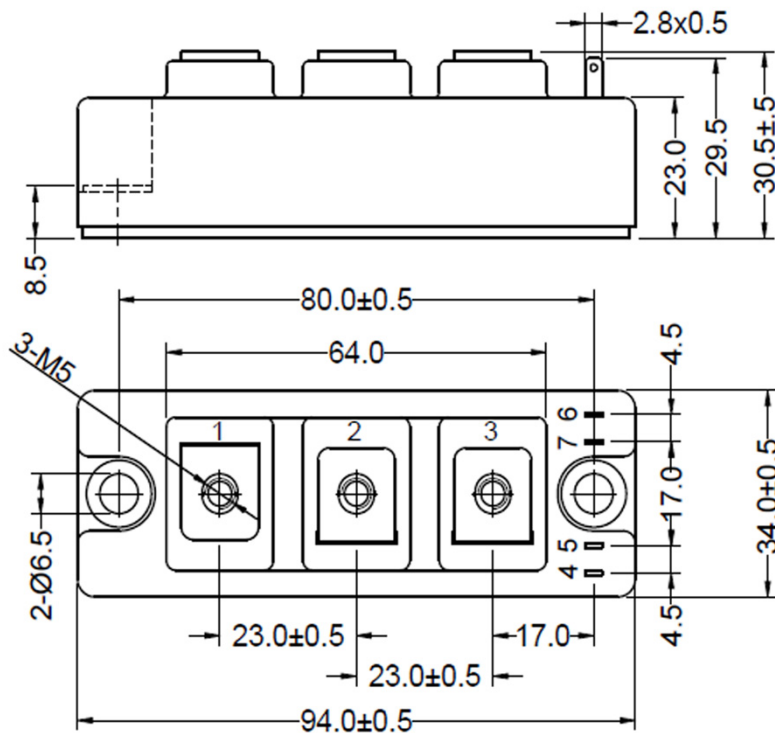

Dimensions in (mm)
Figure 14. Package Outline