


## PRODUCT FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

## APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter
- UL:E332185



### Module Type

Module Type	$V_{RRM}$	$V_{RSM}$	Unit
	Repetitive Peak Reverse Voltage	Non-Repetitive Peak Reverse Voltage	
MMD100E180X	1800	1900	V

### ABSOLUTE MAXIMUM RATINGS( $T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
$I_D$	Output Current(D.C.)	Three phase, full wave, $T_c= 95^\circ\text{C}$	100	A
$I_{FSM}$	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value, $T_J = 45^\circ\text{C}$	1000	
		1/2 cycle, 60HZ, peak value, $T_J = 45^\circ\text{C}$	1100	
$I^2t$	For Fusing	1/2 cycle, 50HZ, peak value, $T_J = 45^\circ\text{C}$	5.0	$\text{KA}^2\text{S}$
		1/2 cycle, 60HZ, peak value, $T_J = 45^\circ\text{C}$	5.1	
$P_D$	Power Dissipation		830	W
$T_J$	Junction Temperature		-40 to +150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-40 to +125	$^\circ\text{C}$
$V_{ISO}$	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module to Sink	Recommended (M5)	2.5~5	Nm
Torque	Module Electrodes	Recommended (M5)	2.5~5	Nm
$R_{thJC}$	Junction to Case Thermal Resistance	per diode	0.9	K /W
		per module	0.15	
Weight			150	g

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: [www.macmicst.com](http://www.macmicst.com)

ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$I_{RM}$	Maximum Reverse Leakage Current	$V_R = V_{RRM}$			0.5	mA
		$V_R = V_{RRM}, T_J = 125^\circ\text{C}$			10	
$V_F$	Forward Voltage Drop	$I_F = 100\text{A}$			1.35	V
$r_T$	For power loss calculations only, $T_J = 125^\circ\text{C}$				0.92	V
					3.8	$\text{m}\Omega$

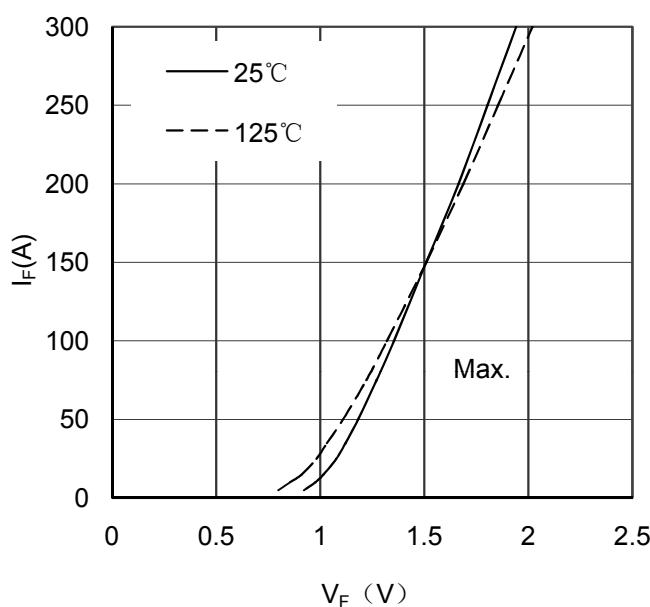


Figure 1. Forward Voltage Drop vs Forward Current

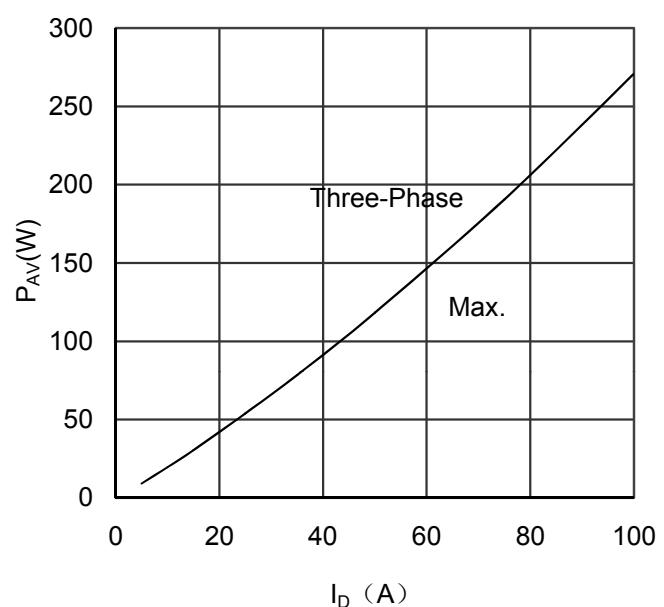


Figure 2. Power dissipation vs Output Current

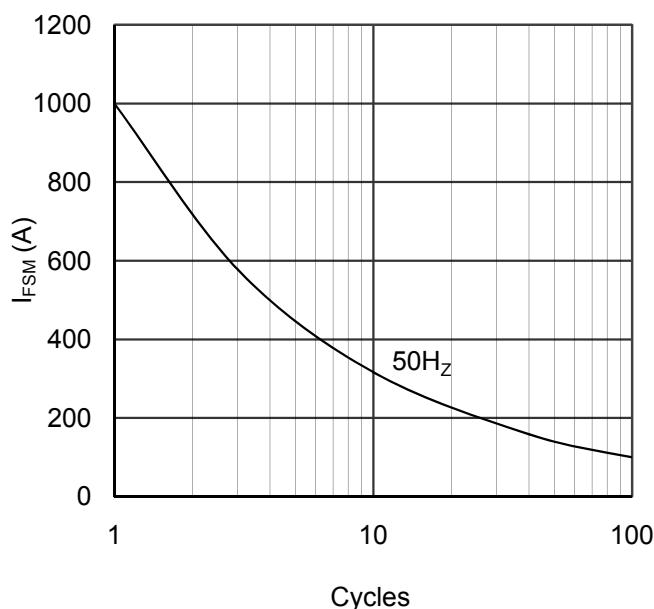


Figure 3. Max Non-Repetitive Forward Surge Current


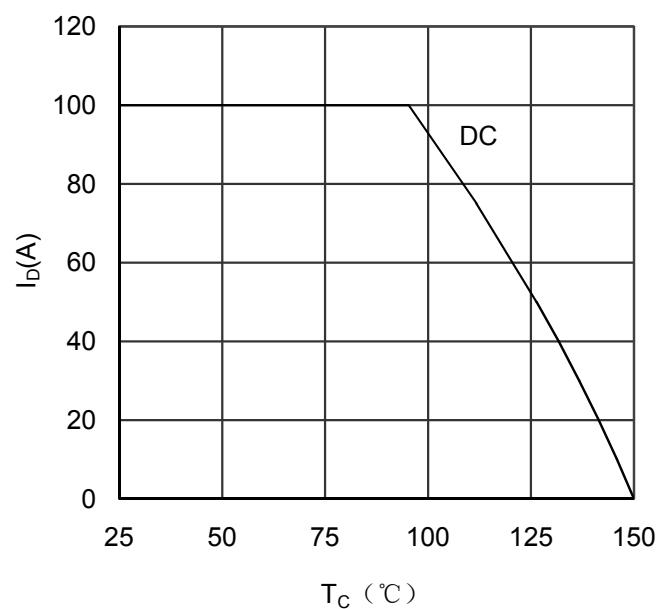



Figure 4. Output current vs Case temperature

# MMD100E180X

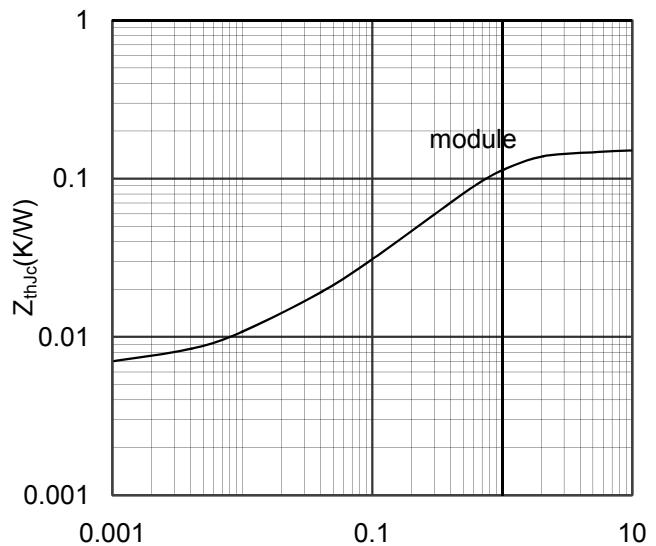

Rectangular Pulse Duration(S)

Figure 5. Transient Thermal Impedance

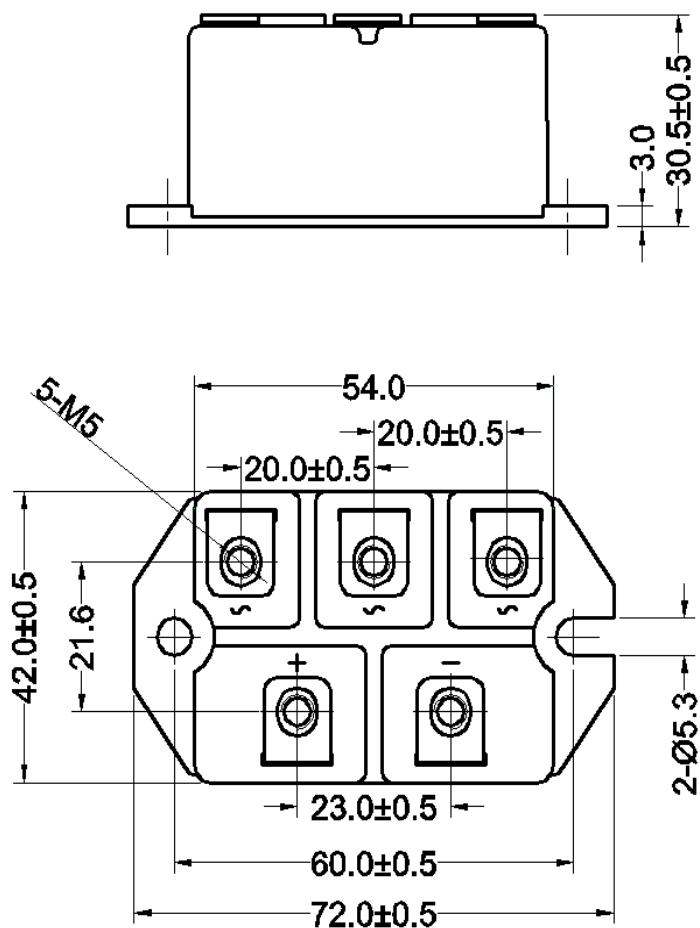

Dimensions in (mm)

Figure 6. Package Outline